






## JOKER 417\_ST

design Roberto Semprini

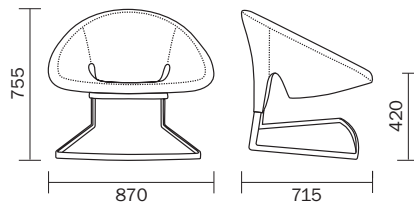

<p><b>MATERIALI</b> Materials / Materialien / Matériaux / Materiales</p>	<p>- <b>SEDUTA</b> / SEAT / SITZ / ASSISE / ASIENTO  <b>Struttura interna in acciaio, stampata in poliuretano flessibile ignifugo (densità 60 kg/m3)</b> / Internal structure made of steel, moulded fire retardant flexible polyurethane (density 60 kg/m3) / Inneres Gestell aus Edelstahl, Schale aus flexiblem Polyurethan, schwerentflammbar (Dichtigkeit 60 kg/m3) / Structure interne en acier, injectée en polyuréthane flexible ignifuge (densité 60 kg/mc) / Estructura interna de acero inoxidable, moldeo de poliuretano flexible ignifugo (densidad de 60 kg/m3)</p> <p>- <b>TESSUTO</b> / FABRIC / STOFF / TISSU / TEJIDO  <b>Cat. H - P</b></p> <p>- <b>TELAIO</b> / FRAME / GESTELL / STRUCTURE / ARMAZÓN  <b>Piatto in acciaio trafilato 30x10mm</b> / Drawn steel plate 30x10mm / Aus Blankstahl, Rohr 30x10mm / Platine en acier tréfilé 30x10mm / Acero moldeado 30x10mm</p> <p>- <b>FINITURA TELAI</b> / FRAME FINISH / AUSFÜHRUNG DES GESTELL / FINITIONS STRUCTURE / ACABADO ARMAZÓN  <b>ST - Nichel-Satinato</b> / ST - Nickel-Satinized / ST - Nickel-Satiniert / ST - Nickel-Satiné / ST - Níquel-Satinado  <b>Trattamento di nichel-satinatura conforme alla normativa UNI EN ISO 14001</b> / Nickel satinized treatment complying with the normative UNI EN ISO 14001 / Nickel-Satinierung gemäß UNI EN ISO 14001 Vorschriften / Traitement de nickel-satinage conforme à la réglementation UNI EN ISO 14001 / Tratamiento de níquel-satinado compatible con la normativa UNI EN ISO 14001</p>
<p><b>UTILIZZO</b> Uso / Verwendung / Emploi / Uso</p>	<p><b>Contract &amp; Residential, indoor</b></p>
<p><b>NORMATIVE e CERTIFICAZIONI</b> Regulations and certificates / Bestimmungen und Zertifikat / Normatives et certifications / Normativas y certificados</p>	<p><b>Conforme alla norma: carico statico sul sedile-schienale EN 1728:2012 - EN 16139:2013, livello L2 - estremo</b>  Conforming to: seat and back static load test EN 1728:2012 - EN 16139:2013, level L2 - extreme  <b>Conforme alla norma: resistenza a fatica del sedile-schienale, 200.000 cicli EN 1728:2012 - EN 16139:2013, livello L2 - estremo</b>  Conforming to: combined seat and back fatigue test, 200.000 cycles EN 1728:2012 - EN 16139:2013, level L2 - extreme</p>
<p><b>ALLEGATI</b> Attachments / Anlage / Annexes / Anexos</p>	<p>Pulizia e manutenzione / Use &amp; care / Nutzung und Pflege / Nettoyage et entretien / Uso y mantenimiento</p>